

ScanSnap



1 1/2 X
Faster
Performance

ScanSnap S1300i

Portable Color Duplex Scanner for PC and Mac

shaping tomorrow with you




Stack. Scan. Simple!




The portable ScanSnap S1300i provides PC and Mac users the tools to be productive and paperless...anywhere.

Features for PC


ScanSnap Organizer 4.1 allows PC users a convenient way to store, manage, and view PDF and JPEG files as well as perform post-scan editing, keyword entry, and searchable PDF conversion.

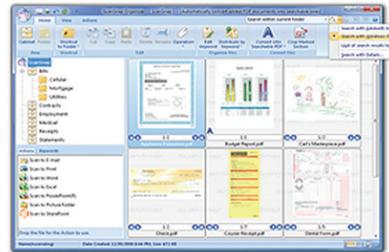

CardMinder 4.1 provides PC users a fast way to capture both sides of a business card, extract the information automatically, and export it to Outlook, Act!, and other contact management software.

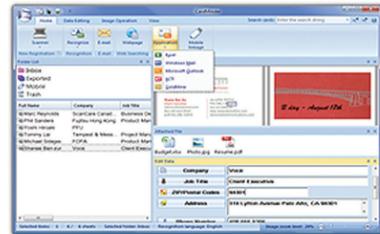

ScanSnap Quick Menu for PC

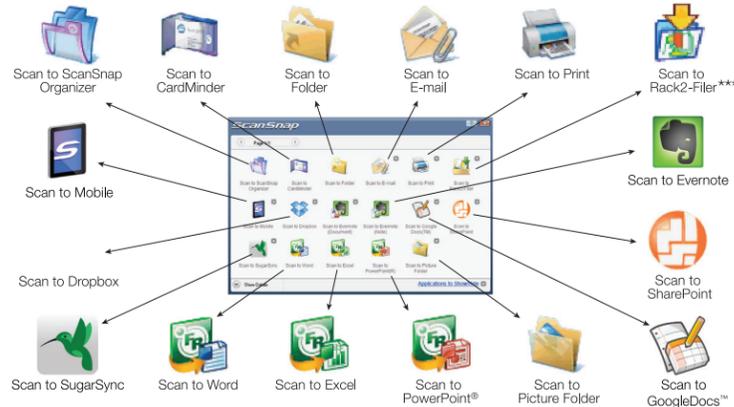

Scan to Cloud

S1300i provides users a convenient way to send scanned documents directly to your existing Evernote, Dropbox, Google Docs, SugarSync and Salesforce accounts.*

Scan to Smart Phones and Tablets

Like all scanners of the ScanSnap series, the S1300i supports wireless scanning to iPad and iPhone devices via the mobile app ScanSnap Connect Application, which now comes in a version for select Android™ smartphones and tablets.



ScanSnap Sync

Quickly and easily synchronize your scanned documents between ScanSnap Organizer on your computer and the ScanSnap Connect App on your mobile device using Dropbox, Google Drive or OneDrive. ScanSnap Sync automatically synchronizes scanned documents between your computer and mobile device, giving you more flexibility to manage your scanned data.


ScanSnap Folder
Scan 'outside-the-box' into virtually any application or cloud service from a PC (for Windows®).

ScanSnap Receipt™
ScanSnap Receipt allows users to easily scan and extract information from receipts, and export the data into CSV for easy tax filing. ScanSnap Receipt also supports multiple languages and currencies.**


ABBYY FineReader for ScanSnap
provides users one-button scanning directly to editable Microsoft Word and Excel files.



Features for Mac




Scan to Functions allows Mac users a flexible way to manage their PDF, Searchable PDF, and JPEG files. Operators can save content to a folder, a network folder, iPhoto, and even directly to their iDisk account.



Cardiris provides Mac users a convenient way to scan their business cards and export the contact information directly to Address Book or Entourage.

ScanSnap Quick Menu for Mac

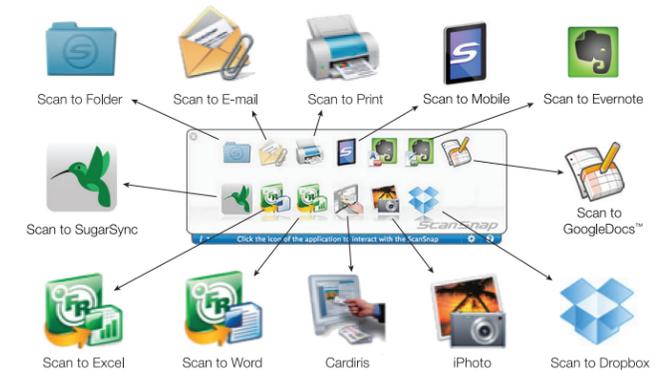

ScanSnap Automatic Features

Auto Color Detection




Color, Grayscale, & Monochrome

Auto Quality Function



Increases resolution to Best on small documents (A6 or smaller)

Auto Paper Size Detection

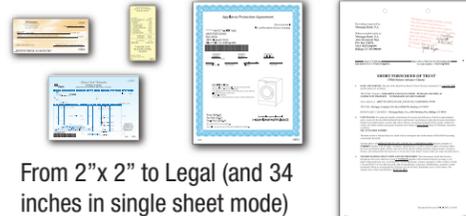

From 2"x 2" to Legal (and 34 inches in single sheet mode)

Auto De-skew & Orientation



Straightens crooked documents and helps rotate upside-down ones

Auto Keyword Function



Use a standard highlighter pen on B & W documents to create searchable keywords



*Internet connection required. Service fees may apply. **Supported languages: English, Spanish, French, German, Italian, Russian. Supported currency's: USD (United States Dollar), CAD (Canadian Dollar), GBP (Great Britain Pound), EUR (Euro), RUB (Russian ruble), AUD (Australian dollar) ***Rack2-Filer 5.0 license is provided with ScanSnap S1300i Deluxe Bundle only (Part: PA03643-B015).

■ General Specifications

Product name		ScanSnap S1300i	
Scanner type		ADF (Automatic Document Feeder), duplex scanning	
Scanning modes		Color, grayscale, monochrome, automatic (color / grayscale / monochrome detection)	
Image sensor		CIS (Contact Image Sensor) x 2	
Light source		3 Color LED (Red / Green / Blue)	
Optical resolution		600 dpi	
Scanning speed (A4 portrait) *1	AC adapter	Auto mode *2	Simplex / Duplex: 6 ppm
		Normal mode	Color / Grayscale: 150 dpi, Monochrome: 300 dpi, Simplex / Duplex: 12 ppm
		Better mode	Color / Grayscale: 200 dpi, Monochrome: 400 dpi, Simplex / Duplex: 9 ppm
		Best mode	Color / Grayscale: 300 dpi, Monochrome: 600 dpi, Simplex / Duplex: 6 ppm
		Excellent mode	Color / Grayscale: 600 dpi, Monochrome: 1,200 dpi, Simplex / Duplex: 1 ppm
	USB bus powered *3	Auto mode *2	Simplex / Duplex: 2 ppm
		Normal mode	Color / Grayscale: 150 dpi, Monochrome: 300 dpi, Simplex / Duplex: 4 ppm
		Better mode	Color / Grayscale: 200 dpi, Monochrome: 400 dpi, Simplex / Duplex: 3ppm
		Best mode	Color / Grayscale: 300 dpi, Monochrome: 600 dpi, Simplex / Duplex: 2ppm
		Excellent mode	Color / Grayscale: 600 dpi, Monochrome: 1,200 dpi, Simplex / Duplex: 1 ppm
Document size	Normal mode	A4, A5, A6, B5, B6, Business card, Post card, Letter, Legal and Custom sizes (Max: 216 x 360 mm (8.5 x 14.17 in.), Min: 50.8 x 50.8 mm (2 x 2 in.)) / Automatically recognizes document size	
	Long paper scanning *4	863 mm (34 in.)	
Paper weight (Thickness)		64 to 104.7 g/m ² (17.1 to 28.0 lb)	
Paper chute capacity *5		Maximum 10 sheets (A4, 80 g/m ² or 20 lb)	
Interface		USB 2.0 (USB 1.1 Compatible)	
Power requirement	AC adapter	AC 100 to 240 V, 50 / 60 Hz	
	USB bus power	5 V / 1 A (0.5 A x 2 port)	
Power consumption	Power cable connection	During operation: 9 W or less, During sleep mode: 2.6 W or less, During off mode: 0.5 W or less	
	USB bus power cable connection	During operation: 5 W or less, During sleep mode: 2 W or less, During off mode: 0.5 W or less	
Operation environment		Temperature: 5 to 35 °C (41 to 95 °F) Relative humidity: 20 to 80 % (Non-condensing)	
Dimensions (W x D x H) *6		284 x 99 x 77 mm (11.18 x 3.90 x 3.03 in.)	
Device weight		1.4 kg (3.08 lb)	
Environmental compliance		ENERGY STAR® / RoHS	
Multifeed detection		Length check	
Driver		Specific driver ● Windows®: Does not support TWAIN / ISIS™ ● Mac OS: Does not support TWAIN	

*1 Scanning speeds may vary due to the system environment used. *2 Documents measuring approximately 148 mm in length or less are scanned in "Best mode", while other documents are scanned in "Better mode". *3 When using the USB bus power cable, the personal computer must have two USB ports: one for power feeding, the other for USB cable connection. *4 ScanSnap S1300i is capable of scanning documents that exceed A4 size in length. It supports the scanning of longer documents in all modes, except for "Excellent mode". *5 Maximum capacity varies, depending upon paper weight. *6 When chuter is closed.

■ Software

	Windows®	Mac OS
Driver *1 *2	ScanSnap Manager	ScanSnap Manager
Applications	ScanSnap Organizer	ScanSnap Organizer
	ScanSnap Receipt	ScanSnap Receipt
	CardMinder	CardMinder
	ABBYY FineReader for ScanSnap™	ABBYY FineReader for ScanSnap™
	Scan to Microsoft® SharePoint®	-

*1 TWAIN or ISIS™ applications cannot be used directly. *2 "One Touch" image file (JPEG, PDF and searchable PDF) generation. These functions are operable with ScanSnap Manager (ScanSnap specific driver).

■ Options

Description	Part number	Remarks
ScanSnap S300 Soft Case *1	PA03541-0004	Intended for ScanSnap S1300i, S1300, S300, S300M and included items

*1 This product has been especially designed for storing and carrying ScanSnap S1300i / S1300 / S300 / S300M. Please note that this product is not guaranteed to withstand damage by excessive shock or external pressure.

This scanner is designed to digitize materials that can be reproduced lawfully, in accordance with applicable copyright regulations and other laws. ScanSnap users are responsible for how they use this scanner. It is imperative that ScanSnap users comply with all applicable local rules and laws, including, without limitation, copyright laws when using this scanner.

*ABBYY and FineReader are trademarks of ABBYY Software, Ltd., which may be registered in some jurisdictions. ABBYY™ FineReader™ Engine ©ABBYY. OCR by ABBYY. *Evernote is a registered trademark or trademark of Evernote Corporation. *Google, Google Drive, Android and Google Play are registered trademarks or trademarks of Google Inc. *Intel, Pentium, and Intel Core are registered trademarks or trademarks of Intel Corporation in the United States and other countries. *ISIS™ is a registered trademark of EMC Corporation in the United States. *Mac, Mac OS, OS X, iPad, iPhone and App Store are trademarks of Apple Inc. *Microsoft, Windows, Windows Vista, Excel, PowerPoint, SharePoint, Internet Explorer and OneDrive are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. *Word is the product of Microsoft Corporation in the United States. *Salesforce and Salesforce CRM are registered trademarks or trademarks of salesforce.com which is based in the U.S. *ScanSnap, ScanSnap logo, ScanSnap Manager, ScanSnap Organizer and CardMinder are registered trademarks or trademarks of PFLIMITED in Japan. *Wi-Fi and Wi-Fi Protected Setup are trademarks of Wi-Fi Alliance. *Other company names and product names are the trademarks or registered trademarks of the respective companies.

For more ScanSnap related information, visit our website at : <http://scansnap.fujitsu.com/>

⚠ Safety Precautions	Be sure to carefully read all safety precautions prior to using this product and use this device as instructed.	Do not place this device in wet, moist, steamy, dusty or oily areas. Using this product under such conditions may result in electrical shock, fire or damage to this product.
-----------------------------	---	---

Specifications are subject to change without notice.

■ ScanSnap S1300i System Requirements

● Windows®

Compatible operating systems		Windows® 10 (32-bit / 64-bit) *1	Windows® 8.1 / 8 (32-bit / 64-bit) *1	Windows® 7 (32-bit / 64-bit)	Windows Vista® (32-bit / 64-bit) SP2 or later	Windows® XP (32-bit) SP3 or later
Driver / Applications *2	ScanSnap Manager	Supported	Supported	Supported	Supported	Supported
	ScanSnap Organizer	Supported	Supported	Supported	Supported	Supported
	ScanSnap Receipt *10	Supported	Supported	Supported	Supported	Not supported
	CardMinder	Supported	Supported	Supported	Supported	Supported
	ABBYY FineReader for ScanSnap™	*3	Supported	Supported	Supported	Supported
Scan to Microsoft® SharePoint®	Supported		Supported	Supported	Supported	
Hardware requirements *4	CPU *5	Intel® Core™ i5 2.5 GHz or higher				
	Memory capacity *5	4 GB or more				
	Display	1,024 x 768 pixels or more		800 x 600 pixels or more		
	Disk capacity *6	3.5 GB or more of free hard disk space				
	DVD-ROM drive	Required for installation *7				
	USB port *5 *8	USB 3.0 *9 / USB 2.0 / USB 1.1				

*1 Operate as a desktop application. *2 Please refer to the ScanSnap website for latest support information. *3 After confirming each company's policies, we will update support status for each application on PFL website. *4 The ScanSnap device may not work if the connected computer does not meet these requirements. *5 Scanning speeds may drop if recommended CPU, memory capacity and USB 1.1 requirements are not met. *6 Microsoft .NET Framework 3.5 SP1 will be installed (requires 500 MB of disk space) together with ScanSnap Manager, ScanSnap Organizer or CardMinder for systems that do not have .NET Framework 3.5 SP1 installed. When using "Scan to Google Drive" with ScanSnap Manager/ScanSnap Organizer, users also need to install either .NET Framework 4 or in-place updates of .NET Framework 4. *7 If you have no DVD-ROM drive, please visit the following website: <http://scansnap.fujitsu.com/g-support/en/> *8 ScanSnap operates on both USB 2.0 and USB 3.0 without any difference in performance. *9 Some computers do not recognize the ScanSnap when it is connected to a USB 3.0 port. In this case, please use a USB 2.0 port. *10 Available via ScanSnap online update. *System requirements may change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

● Mac OS

Compatible operating systems		OS X v10.10	OS X v10.9 (Recommended: v10.9.5 or later)	OS X v10.8 (Recommended: v10.8.5 or later)	OS X v10.7 (Recommended: v10.7.5 or later)	OS X v10.6 (Recommended: v10.6.8)
Driver / Applications *1	ScanSnap Manager	Supported	Supported	Supported	Supported	Supported
	ScanSnap Organizer	Supported	Supported	Supported	Supported	Not supported
	ScanSnap Receipt *7	Supported	Supported	Supported	Supported	Not supported
	CardMinder	Supported	Supported	Supported	Supported	Supported
	ABBYY FineReader for ScanSnap™	Supported	Supported	Supported	Supported	Supported
Hardware requirements *2	CPU *3	Intel® Core™ i5 2.5 GHz or higher				
	Memory capacity *3	4 GB or more				
	Display	1,024 x 768 pixels or more				
	Disk capacity	2.5 GB free hard disc space for installation				
	DVD-ROM drive	Required for installation *4				
USB port *3 *5	USB 3.0 *6 / USB 2.0 / USB 1.1					

*1 Please refer to the ScanSnap website for latest support information. *2 The ScanSnap device may not work if the connected computer does not meet these requirements. *3 Scanning speeds may drop if recommended CPU, memory capacity and USB 1.1 requirements are not met. *4 If you have no DVD-ROM drive, please visit the following website: <http://scansnap.fujitsu.com/g-support/en/> *5 ScanSnap operates on both USB 2.0 and USB 3.0 without any difference in performance. *6 Some computers do not recognize the ScanSnap when it is connected to a USB 3.0 port. In this case, please use a USB 2.0 port. *7 Available via ScanSnap online update. *System requirements may change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

■ Included items

● AC cable	● USB bus power cable	● Set-up DVD-ROM
● AC adapter	● USB cable	● Safety Precautions

■ Consumables

Description	Part number	Remarks
Pick Roller *1	PA03541-0001	Life cycle: Every 100,000 sheets or one year.
Pad Assy *1	PA03541-0002	Life cycle: Every 10,000 sheets or one year.
Cleaner F1	PA03950-0352	100 ml bottle : For use on the Pick Roller and Pad Assy
Cleaning Wipe	PA03950-0419	1 pack (24 packets) : For use on the Pick Roller and Pad Assy

*1 These recommended lifetimes are for 80 g/m² (20 lb) A4 sized documents. Therefore, appropriate replacement lifetimes may vary for other document types.

POWERED BY

ABBYY™ FineReader™ Engine ©ABBYY. OCR by ABBYY. ABBYY and FineReader are trademarks of ABBYY.

PFLIMITED, a Fujitsu company, has determined that this product meets the ENERGY STAR® guidelines for energy efficiency. ENERGY STAR® is a registered trademark of the United States.



Fujitsu Computer Products of America, Inc.
1250 East Arques Avenue Sunnyvale, CA 94085-4701
(800) 626-4686 (408) 746-6000
info@cpa.fujitsu.com • <http://us.fujitsu.com/cpa>